



# Ultimate Light Kit Upgrade for Club Car Precedent Installation Instructions



1. Remove and  
retain 3 screws



from dash panel.

Lift off dash panel.

Remove and retain screws



Blue  
12V+


NO

Orange  
48V-

Green/White stripe  
12V+


COM

Blue/White stripe  
48V+

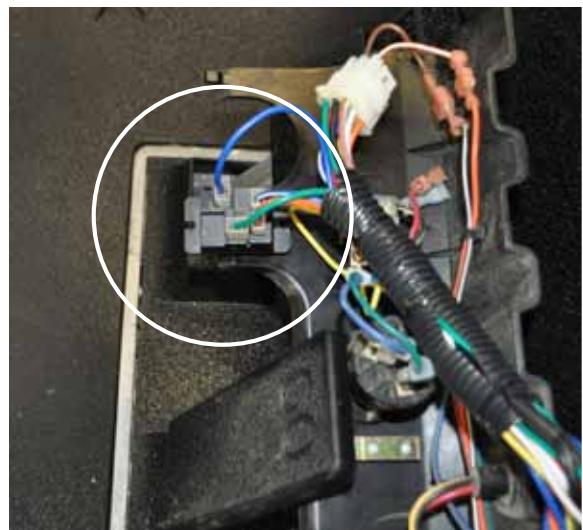

2. Install relay to existing light harness

3. Connect 9-pin  
connecter from signal  
indicator to 9 pin  
connector on harness  
from light kit.

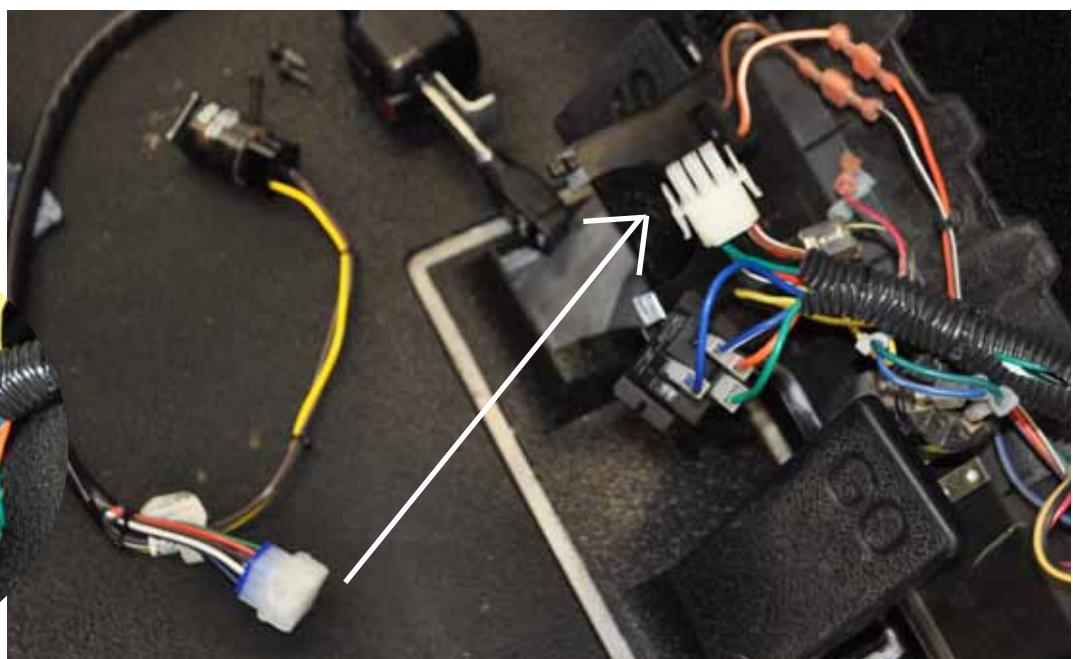



4. Attach turn signal indicator to steering column with Hose Clamp.



Remove and retain screws




5. Remove and retain 4 torx head screws from floor panel of vehicle.




6. Remove Floor Mat and brake cover plate.



7. Loosen Front nut on Brake rod. Place Brake rod clip as shown. Tighten nut to hold in place.

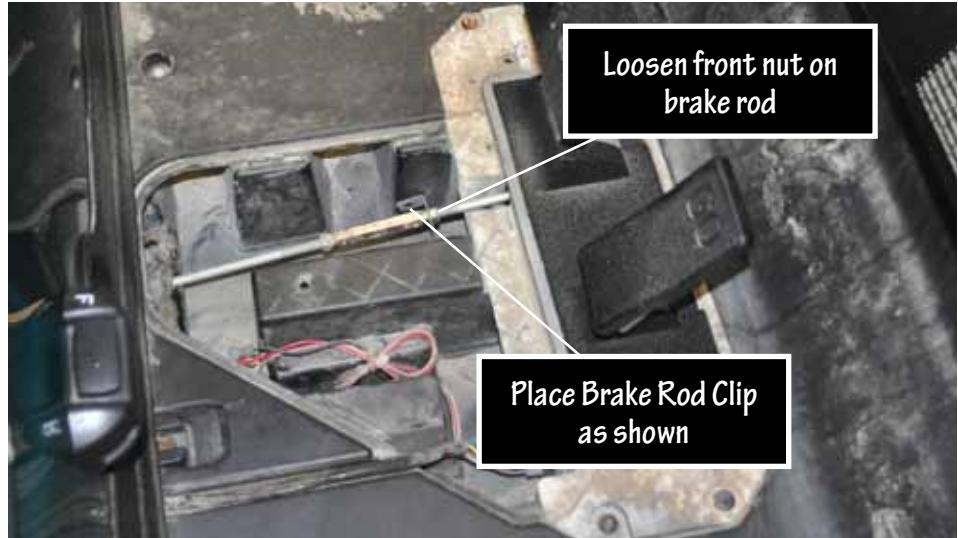


8. Hook Brake  
Switch assembly  
to Brake Rod Clip  
as shown.

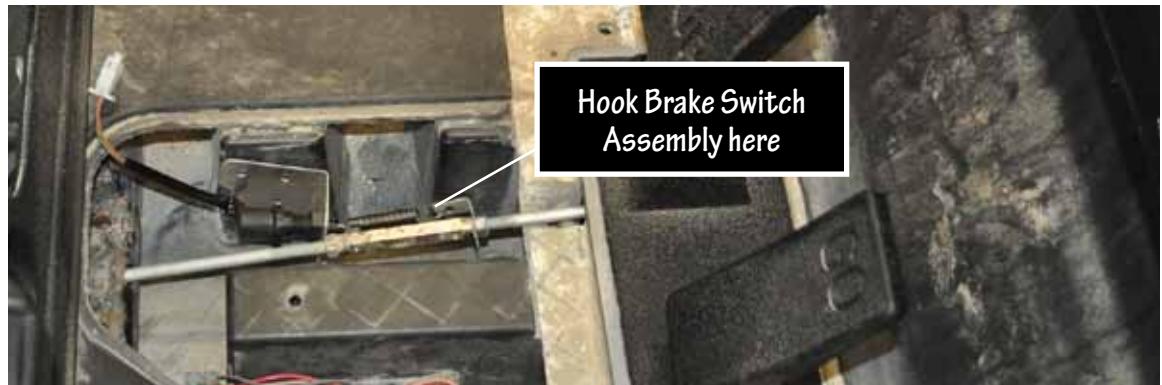

9. With Parking  
Brake OFF, put  
slight tension  
on spring of  
Brake Switch.  
Use Bracket as  
template and drill  
two 1/8" pilot  
holes.




10. Bolt Brake  
Switch Bracket to  
Frame.

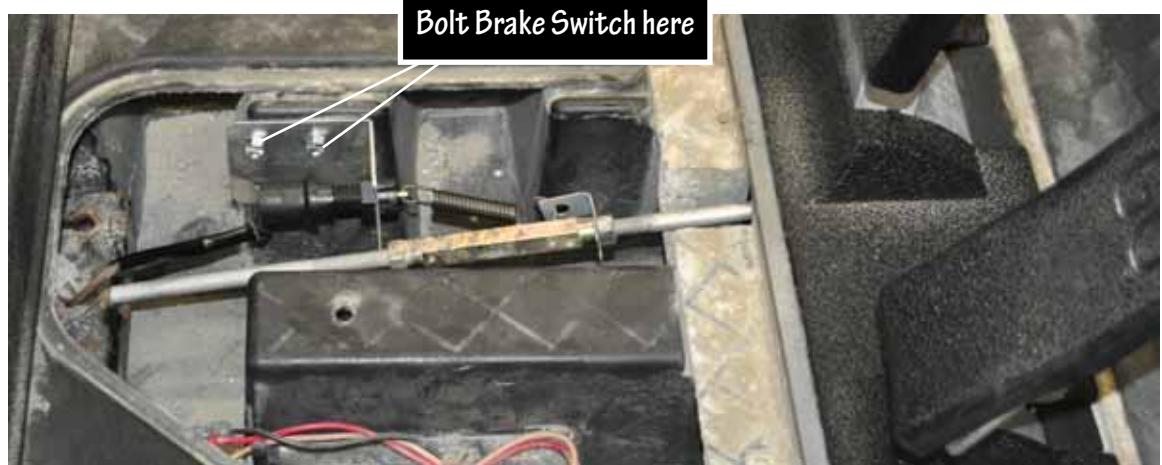

11. Plug timer  
relay into brake  
switch.



12. Pull out existing harness. Connect wires as instructed in photo. Place brake light assembly in right side of well as shown.

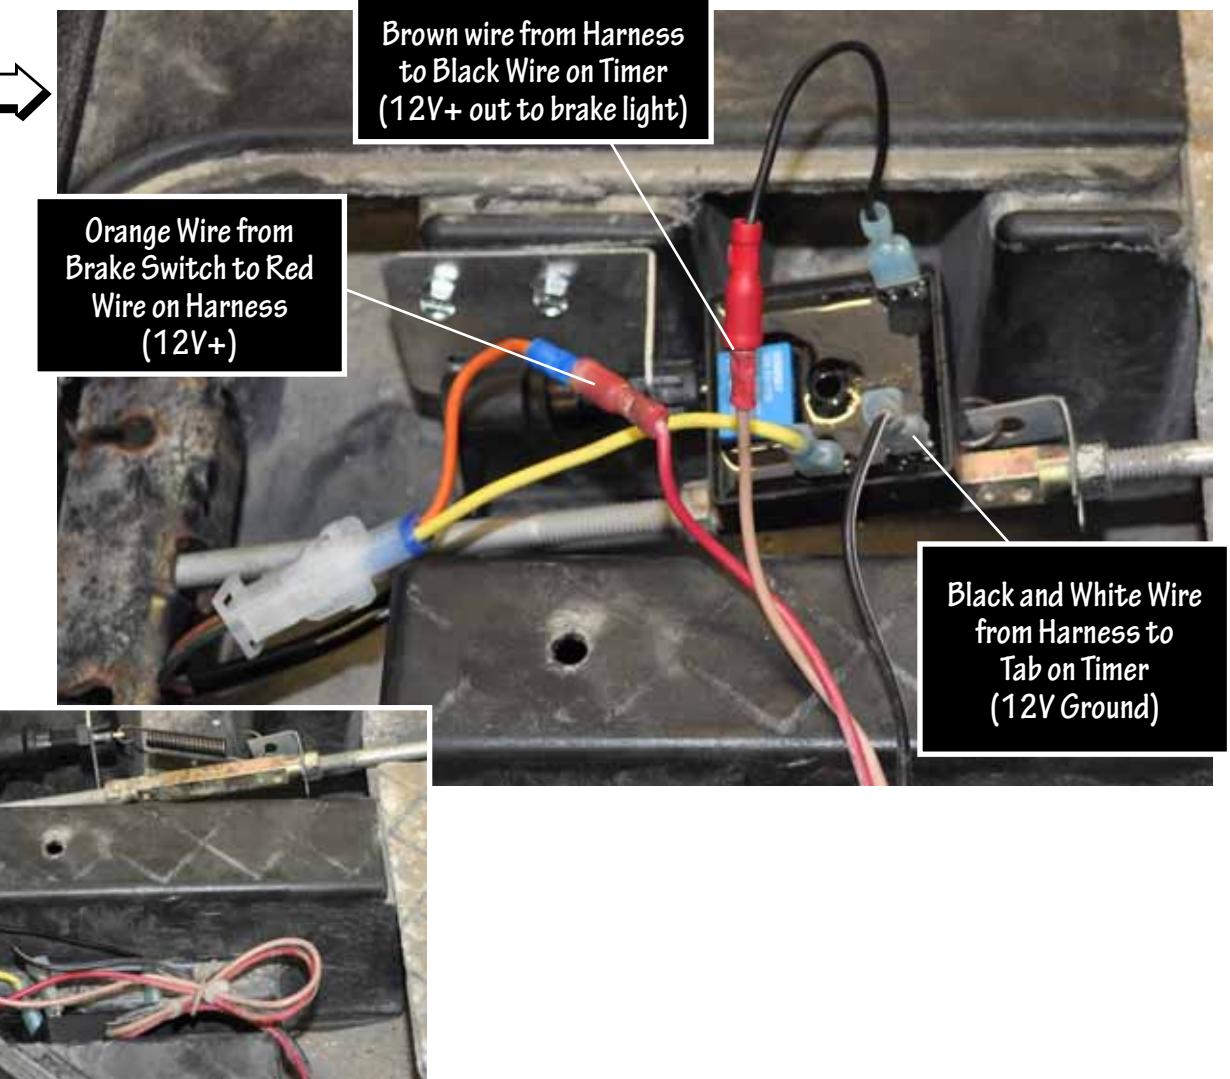

13. With key switch ON, depress and lock parking brake to test brake lights. If they do not light, adjust switch, disconnect connector to brake light switch and turn adjusting nut on brake light switch for proper tension on spring.

14. Replace Brake cover Plate.

15. Replace Floor Mat using screws retained in step 7.



16. Install Horn. Remove Headlight by removing bolts that secure light to vehicle frame. Retain hardware. Remove and retain bolt from support bracket under front end of vehicle on the driver side near VIN tag. Use bolt to attach Horn.



Remove and retain Bolt




Attach Horn



17. Attach  
black and  
orange wires  
on Headlight  
assembly to  
Horn.



18. Reattach  
Headlight  
assembly.

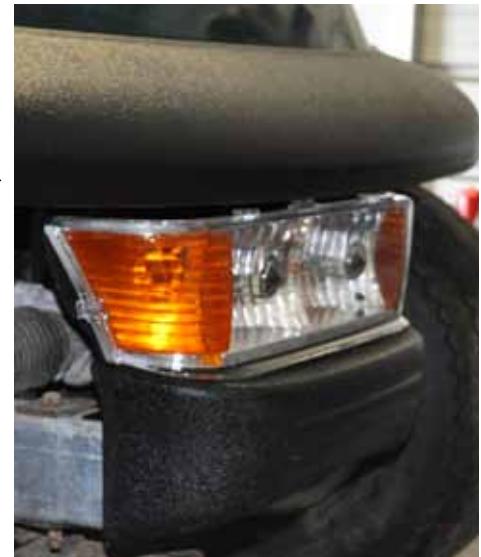



19. Fit harness assembly in dash. Route Signal indicator Harness through round opening with steering column. Attach dash panel with screws retained in step 1.



20. Snap on Steering Column Cover. Gutter of Cover is for Signal Indicator Harness.

