


# Light Bar for EZ-Go TXT Installation Instructions

---

What's in the box:

- Light Bar Assembly
  - Wiring Harness with Push/Pull Switch
  - 6 x M6 Washer
  - 2 x M6 Locknut
  - 2 x Mounting Bracket
  - 6 x M6 x 20mm Hex Head Bolt
  - 6 x M6 Spring Washer
  - 8 x Zip Ties
- 

1. Remove the four factory bolts from the bumper guard housing. **Retain hardware.**

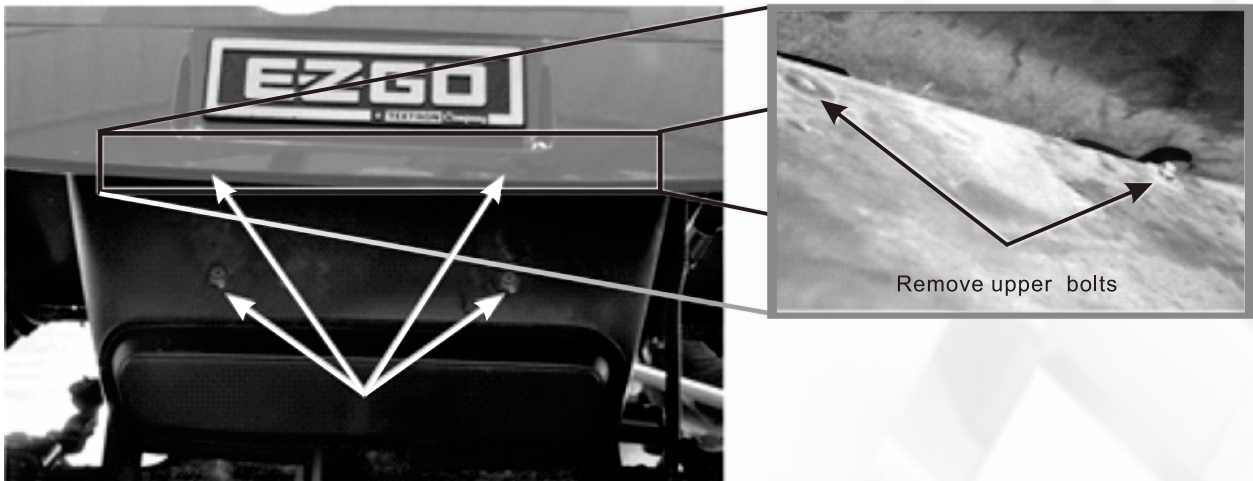

2. Install mounting brackets using hardware retained from **Step 1**.

**IMPORTANT:** Ensure that Light Bar Mounting Tabs point outward.



3. Install Light Bar to Mounting Brackets.

**IMPORTANT:** Do **NOT** tighten any of the bolts until all four bolts are installed. **DO NOT OVERTIGHTEN**, you will strip the threads in the Light Bar Housing.

4. Connect the wiring harness to the battery pack.

**IMPORTANT:** This light is a 12 Volt lighting system. The TXT comes standard with SIX 6 Volt batteries. **The system should be connected across TWO of the 6 Volt batteries in the TXT's Battery Pack ONLY.** Connecting the system across only one battery will result in severely degraded performance (i.e., very dim or non working lights). Connecting the system across more than two batteries will result in a failure that is not covered under the manufacturer's warranty.

