



1. Remove and retain 3 screws from dash panel. Lift off dash panel.

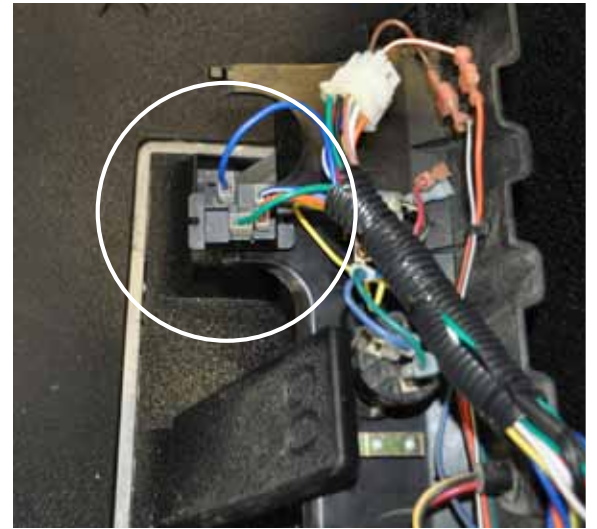

2. Install relay to existing light harness

3. Connect 9-pin connector from signal indicator to 9 pin connector on harness from light kit.

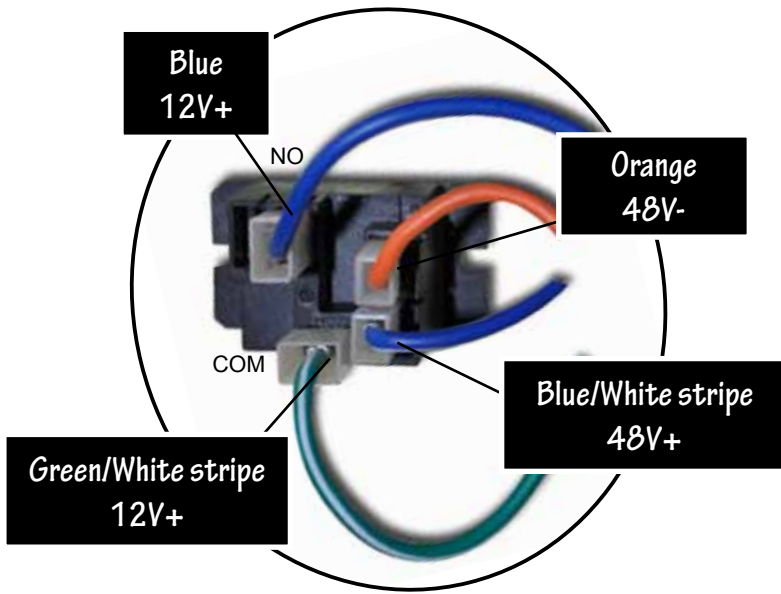