



YAMAHA G2/G9 UTILITY BOX INSTALLATION INSTRUCTIONS

- 1) Remove plastic seat back covers.
- 2) Unbolt and remove sweater basket and bag rack assembly.
- 3) Attach front brackets to seat back frame using existing hardware (See Illus. B).
- 4) Attach box-mounting frames to front brackets using 8mm x 40mm bolts.
- 5) Level mounting frames. Mark holes on outside of rear bumper, drill 3/8" holes and install using 8mm x 25mm bolts.
- 6) Mount box and center box on frame. Ensure clearance for gas kill or electric charge. From underneath, mark six (6) holes on the box through the mounting brackets. Flip box over, drill 3/8" holes at each of the six marks. Use six low profile bolts to fasten box to mounting kit. Washers on underside of frame.
- 7) Install chain using 6mm x 25mm bolts through holes in box by tailgate.

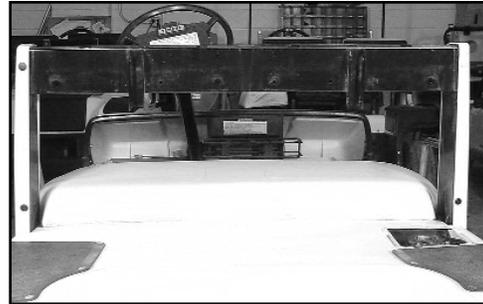


Illus. A

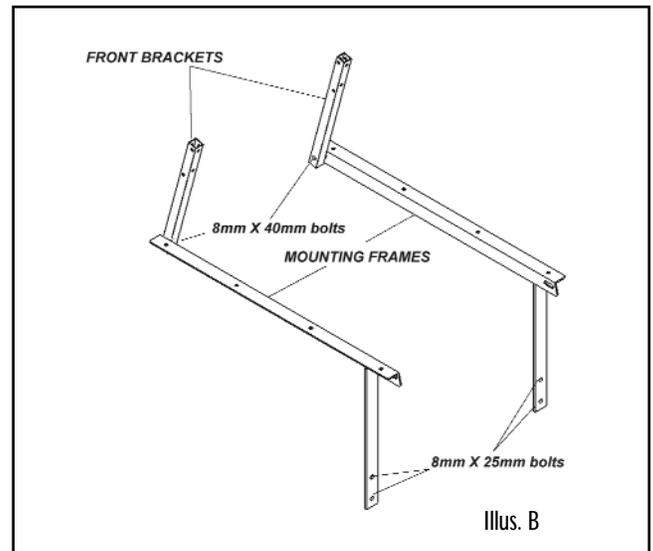

Illus. B



Illus. C

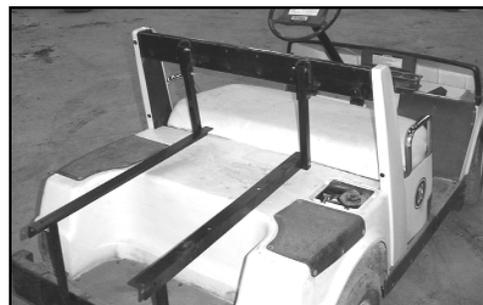

Illus. D