



ACC-RR02 Club Car DS

ACC-RR03 Club Car Precedent

Roof Rack Installation Instructions



Kit Includes:

- a. Roof Rack
- b. Front Roof Rack Mounting Brackets
- c. Rear Roof Rack Mounting Brackets
- d. Roof Rack Mounting Hardware

Step 1: On the driver and passenger sides of the front top strut, remove the rear-most top mounting bolts, nuts, and washers. Install the front roof rack mounting brackets using the ¼-20x2" HCS in the location where you removed the factory top mounting bolts earlier in this step.


Note: Front roof rack mounting brackets have a lower mounting position than the rear roof mounting brackets.



Step 1

Step 2 Club Car DS Installation Only (Precedent installations skip to Step 3): On the driver and passenger sides of the rear top struts, remove the forward-most mounting bolts, nuts, and washers that secure the top. Install the rear roof rack mounting brackets using the ¼-20x2" bolt, nuts, and washers in the location where the factory mounting hardware was removed.

Note: Rear roof mounting brackets have a higher mounting position than the front roof rack mounting brackets.

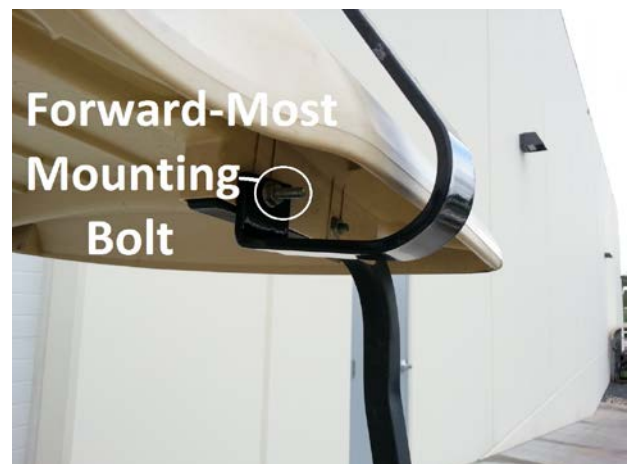

Step 2 Club Car DS Installations ONLY



Step 3 Club Car Precedent Installation Only (DS installations skip to Step 4): On the driver and passenger sides of the rear struts, remove the mounting bolts, nuts, and washers that secure the top. Install the rear roof rack mounting brackets using the ¼-20x2" bolt, nuts, and washers in the location where the factory mounting hardware was removed.

Note: Rear roof mounting brackets have a higher mounting position than the front roof rack mounting brackets.



Step 3 Club Car Precedent Installations ONLY

Step 4: Set the roof rack on top of the newly installed roof rack mounting brackets and adjust to desired location.



Step 4

Step 5: Once you have the roof rack in your desired mounting location on the roof rack mounting brackets, you will need to mark your mounting holes. From the underside of the mounting brackets, make the four mounting locations on the roof rack with a punch or marker.



Step 5

Step 6: Remove the roof rack from the vehicle and place upside down on a safe flat area on the ground. It is recommended to place the roof rack on a clean piece of cardboard to keep from scratching the finish. Locate the four mounting holes marked in Step 5. Drill a 5/16" hole completely through the bottom rail in all four locations.

Step 7: Place the roof rack on top of the roof rack mounting brackets and align with mounting holes drilled in Step 6. Fasten the roof rack to the mounting brackets using the 3Mx35 bolts, nuts, and flat washers. For a softer mount you can also place a rubber spacer (included in your ACC-RR01 roof bracket hardware bag) between the roof rack and mounting bracket before fastening.



Step 7

This completes the installation of your new roof rack. Please enjoy safely.